


Hexagonal V-belt



Product Information

Hexagonal V-Belts are required in applications, where the layout provides changes of rotation of the driven pulleys, typically found in serpentine drives.

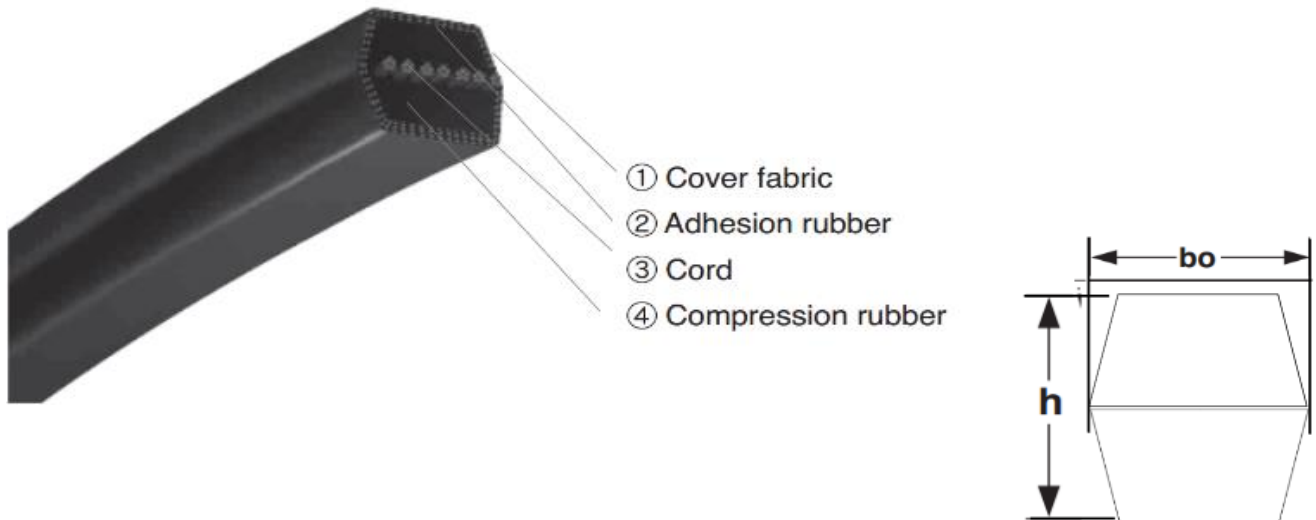

Cross Section	AA	BB	CC
Belt type		Wrapped	
Top width b_o [mm]	12.7	16.7	22.2
Thickness h [mm]	10.2	13.4	17.4
① Cover fabric	Cotton / Polyester mixture		
② Adhesion rubber	NR		
③ Cord	Polyester		
④ Compression rubber	NR/SBR		
Heat resistance temperature [°C]	+90		
Cold resistance temperature [°C]	-40		
Max. belt speed [m/s]	25		
Wear resistance	Normal		
Electric conductivity	Yes		

Product Code

AA100

AA: Cross section

100: Belt length (Inch)