



MEGA TORQUE G

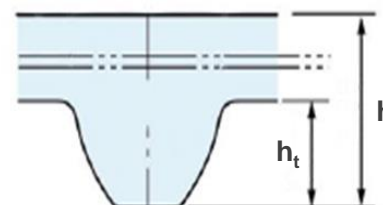

Product Information

Our MEGA TORQUE G has compared to our SUPER TORQUE enhanced power transmission capabilities, which allows a compact layout due to narrow width of belt and pulley.

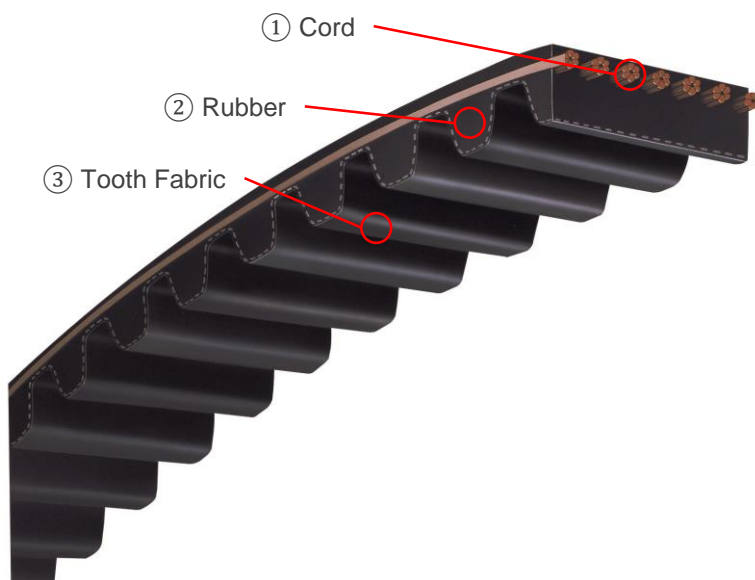

	MTS5M	MTS8M	MTS14M
Belt type	Rubber Timing Belt		
Tooth height h_t [mm]	1.19	3.05	5.30
Belt thickness h [mm]	3.41	5.3	10.2
① Tooth fabric	Nylon		
② Cord	Glass Fiber		
③ Rubber	CR	H-NBR	
Heat resistance temperature [°C]	+90	110	
Cold resistance temperature [°C]	-30		
Max. belt speed [m/s]	30		
Wear resistance	Normal		
Electric conductivity	Yes		

Product Code

4400MTS5M225 G

4400: Belt Width (mmx10)

MT: Quality

S5M: Tooth profile

225 = Belt length (mm)

G: Specification