


Narrow Cogged V-belt



Product Information

Our SUPER AG-COG 4 is mainly used in small and medium size agricultural machinery. In comparison to our standard Orange Label Cogged V-belt, it has higher heat and crack resistance. This belt is suited for applications with back bending and small diameter.

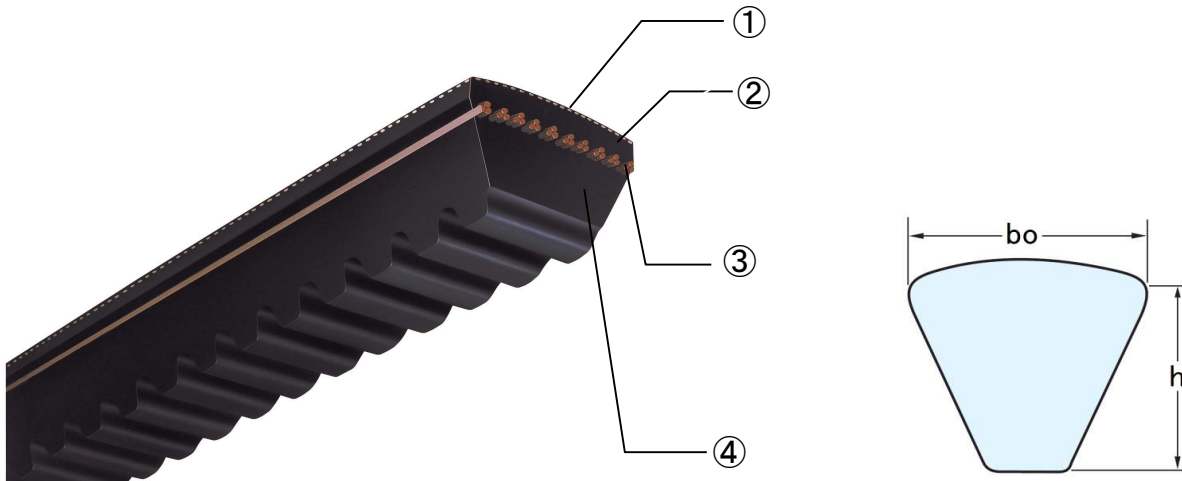

Cross Section	SPZX	SPAX	SPBX	SPCX
Belt type	Raw Edge Cogged			
Top width b_o [mm]	9,7	12,7	16,3	22,0
Thickness h [mm]	8,0	9,0	13,0	18,0
① Cover fabric	Cotton			
② Adhesion rubber	Chloroprene			
③ Cord	Polyester			
④ Compression rubber	Chloroprene			
Heat resistance temperature [°C]	+90			
Cold resistance temperature [°C]	-30			
Max. belt speed [m/s]	40			
Electric conductivity	Yes			

Product Code

SPBX3550

SPB: Cross Section BX: Cogged Type 3550: Belt Code (mm)