


Open Timing Belt



Product Information

The Open Timing Belts are typically used in applications like long-span linear drives and light-duty synchronous power transmission and transportation.

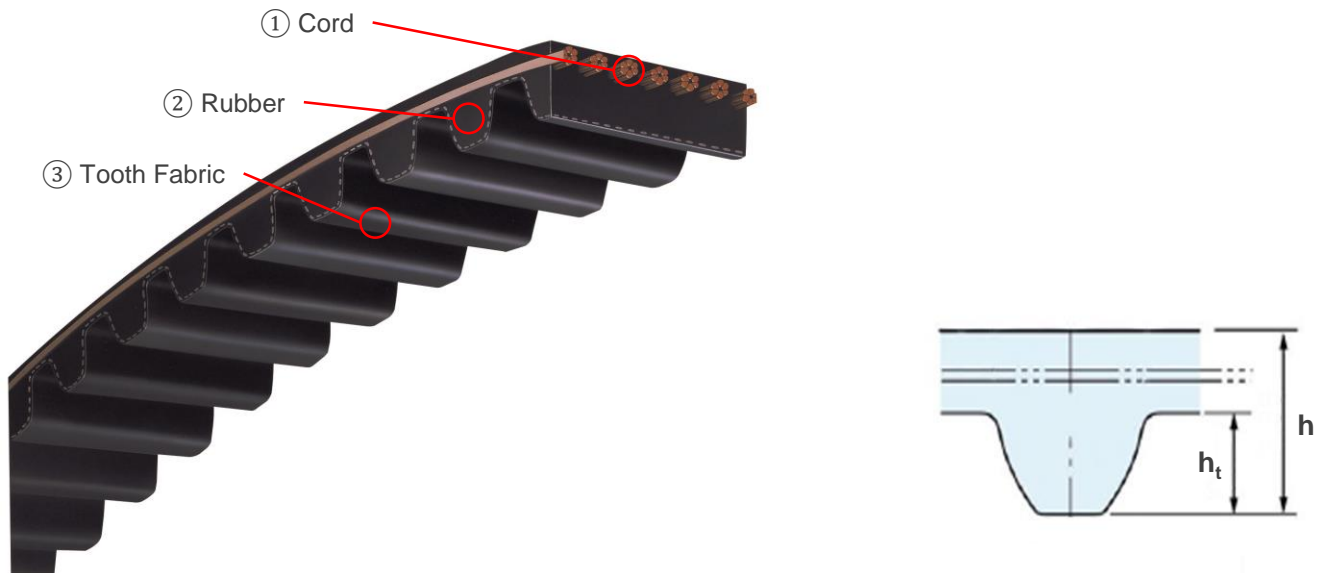

	S2M	S3M	S5M	S8M	S14M
Belt type	Rubber timing belt				
Tooth height h_t [mm]	0.76	1.14	1.91	3.05	5.30
Belt thickness h [mm]	1.36	1.94	3.41	5.3	10.2
① Tooth Fabric	Nylon				
② Cord	Glass fiber				
③ Rubber	CR				
Heat resistance temperature [°C]	+80				
Cold resistance temperature [°C]	-30				
Max. belt speed [m/s]	30				
Wear resistance	Normal				
Electric conductivity	Yes				

Product Code

OPEN 400S8M

OPEN: Open timing belt

400: Belt width (mm x 10)

S2M: Tooth profile