


Product Information

This polyurethan V-belt enables a compact and cost efficient design. The advantages of the Polymax are, that it is not only maintenance-free and has a high stretch resistance. It also allows high-speed power transmission with low vibrations. This product is available in banded version with up to 5 ribs.

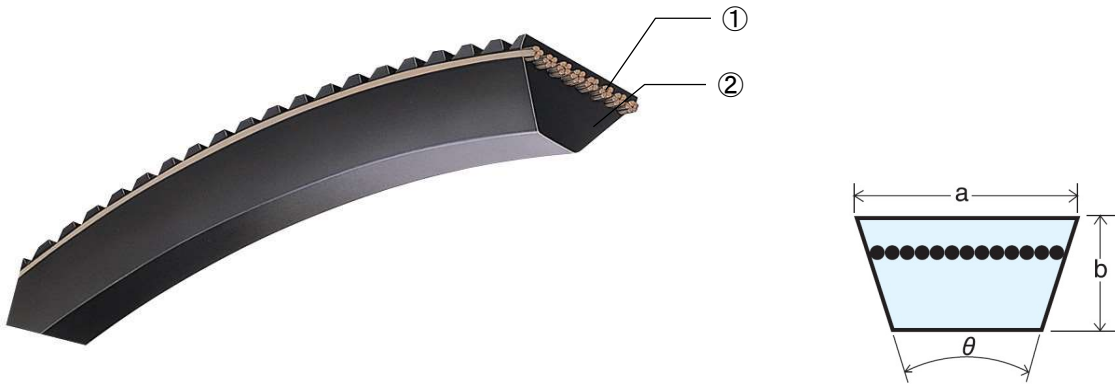

	3M	5M	7M	11M
Top width a [mm]	2,8	4,5	7,5	11,0
Thickness b [mm]	2,0	3,4	5,5	7,0
① Cord	Polyester			
② Material	Polyurethane			
Angle [θ]	60°			
Heat resistance temperature [°C]	+80			
Cold resistance temperature [°C]	-10			

Product Code

PLM5M750

PLM: Polymax 5M: Cross section 750: Belt length (mm)