


Variable Speed Belt



Product Information

With Variable Speed Belts changes in speed can be accurately, smoothly and quietly transmitted from low speed up to high speed with high precision and an excellent coefficient of efficiency. Our belts provide an excellent heat, oil and lateral pressure resistance with almost no elongation. These belts are mainly used for scooter, snow mobiles, agricultural and other industrial machines.

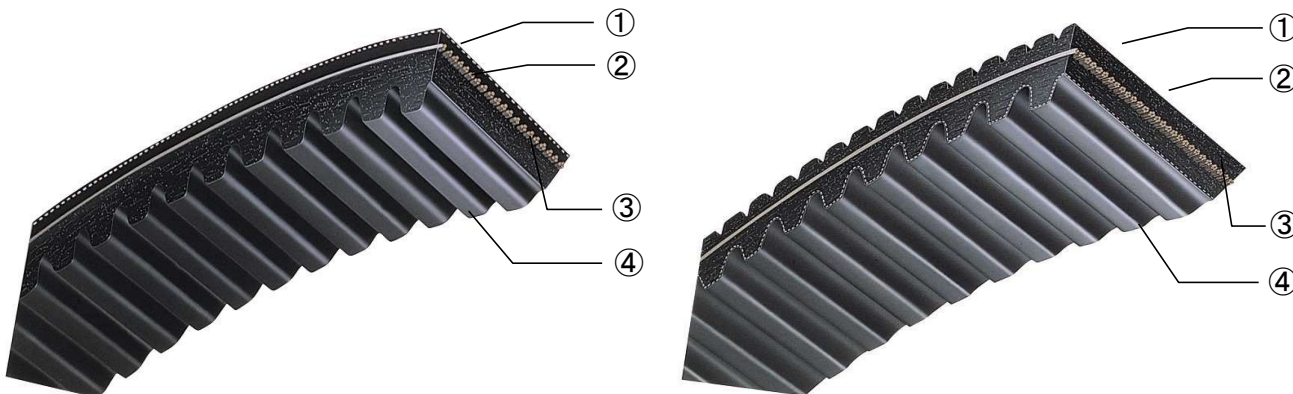

	RCVS	DCVS
Belt type	Raw Edge Cogged	Double Cogged
① Top rubber	-	Chloropren
Top fabric	Cotton	-
② Rubber	Chloroprene	Chloropren
③ Cord	Polyester/Aramid	Polyester
④ Bottom fabric	Nylon	Nylon
Heat resistance temperature [°C]		+90
Cold resistance temperature [°C]		-30
Max. belt speed [m/s]		50
Electric conductivity		Yes
Available size range [mm]	500-3550	1000-6000

Product Code

30 x 10 x 34 x 870

width thickness angle inside length
 (mm) (mm) (°) (mm)