


Flexstar (Flatbelt)



Product Information

Our FLEXSTAR Belt is thin and has excellent flexibility. Because it can use smaller diameter pulleys it allows a compact design. In addition, with the uniform thickness of the belt, it reduces vibration and is suitable for high speed rotation power transmission.

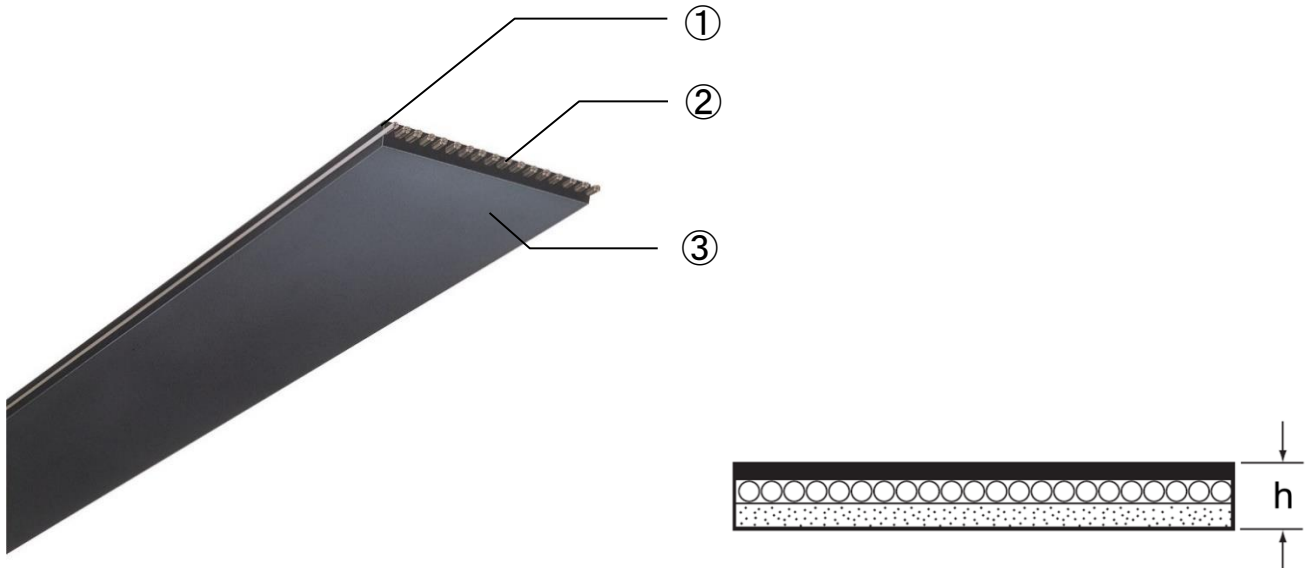

Cross section	FL	FM	FH
Belt type	Rubber flat belt		
Thickness h [mm]	1,5	2,5	3,5
① Cover fabric	Special fiber		
② Cord	Polyester		
③ Rubber	CR		
Max. belt speed [m/s]	60		

Product Code

40FM1500

40: Belt width (mm) FM: Cross section 1500: Belt length (mm)