



## Per Open V-belt

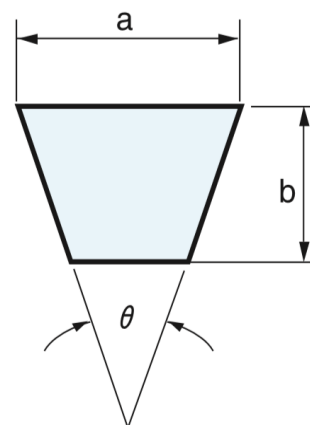

### Product Information

Our Perforated V-Belt uses metal fastener (ordered separately) to adjust a specific length to your individual application. With a high-strength multi-fiber fabric that has a high resistance to oil, heat, and abrasion, Quick-Set Perforated V-Belt provides long durability and corrosion-resistance. These belts are recommended for temporary use when the existing V-belt must be replaced urgently.

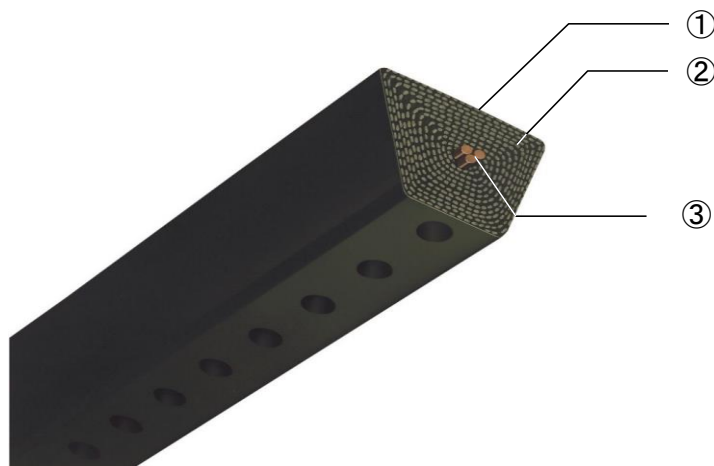

Cross Section	M(Z)	A	B	C
Belt type	Wrapped Belt			
Top width    b   [mm]	10.0	12.5	16.5	22.0
Height        h   [mm]	5.5	9.0	11.0	14.0
Belt angle $\theta$ [°]	40.0	40.0	40.0	40.0
Length per roll   [m]	100	50 / 100 / 200	100	100
Hole diameter   [mm]	2.0	2.5	3.0	4.0
Hole pitch      [mm]	5.0	8.0	9.0	11.0
① Cover fabric	Cotton			
② Rubber	NR			
③ Cord	Polyester			
Heat resistance temperature   [°C]	+100			
Cold resistance temperature   [°C]	-40			
Max. belt speed    [m/s]	30			

### Product Code

## Per Open A

Per Open: Perforated Open

A: Cross Section


## Fastener & Link



### Product Information


Our Fasteners and Links are made of stainless steel and are used in combination with our Perforated Open V-belts. With help of these tools you can adjust a specific length to your individual application.

### Fastener

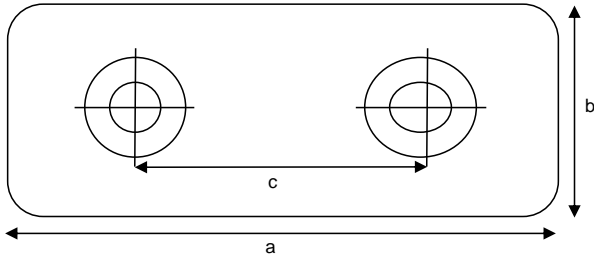

Cross Section	M(Z)	A	B	C
Total length a [mm]	17.5	23.0	26.0	32.0
Total width b [mm]	8.3	10.3	13.3	18.0
Centre distance c [mm]	11.0 ± 0.1	16.0 ± 0.1	17.5 ± 0.1	22.5 ± 0.1
Material	Stainless Steel			

### Link

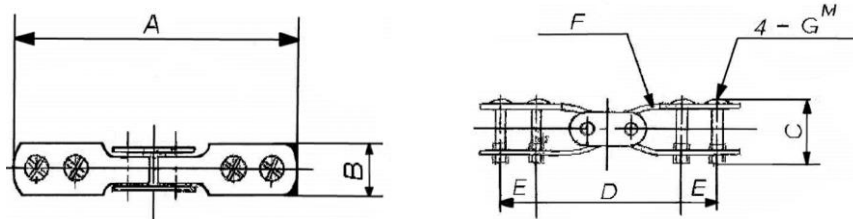

Cross Section	A (Z)	B	C
A [mm]	60.0	75.0	93.0
B [mm]	10.0	13.0	18.0
C [mm]	13.5	17.0	22.5
D [mm]	35.0	47.0	57.0
E [mm]	8.0	8.5	11.5
F [mm]	1.6	2.0	2.3
G [mm]	2.6	3.0	4.0
Material	Stainless Steel		