



Mega Torque EP

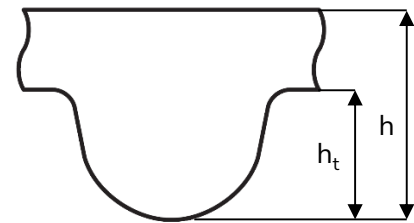

Product Information

Our Mega Torque EP with glass fiber cord, special EPDM rubber compound and Nylon fabric was developed for highest power transmission capabilities. It is able to withstand low and high temperatures, which other belts are not able to.

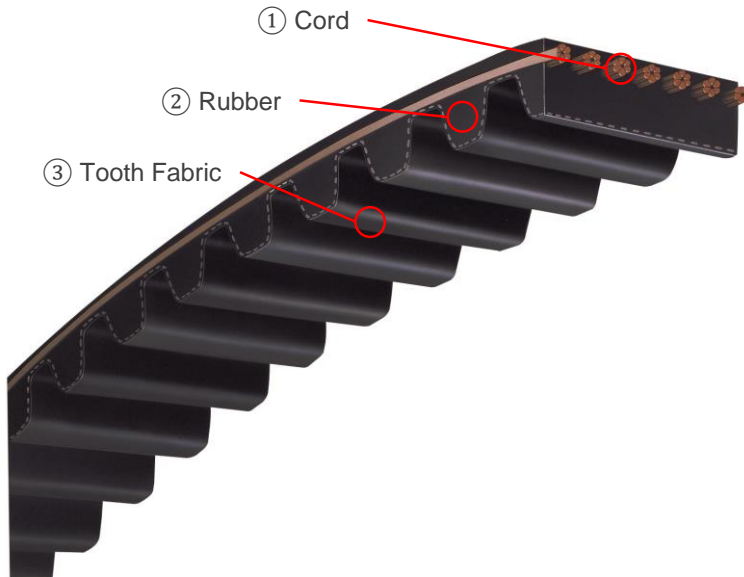

GP8M & GP14M Tooth Profile

	GP8M	GP14M
Belt type	Rubber timing belt	
Tooth height h_t [mm]	3.35	6.10
Belt thickness h [mm]	5.60	10.30
① Tooth fabric	Nylon	
② Cord	Fiber glass	
③ Rubber	EPDM	
Heat resistance temperature [°C]	120°C (140°C, Only intermittently)	
Cold resistance temperature [°C]	- 40°C	
Max. belt speed [m/s]	30	
Wear resistance	Good	
Electric conductivity	No	

Product Code

576GP8M350

576: Length (mm) GP: Tooth Profile 8M: Tooth Pitch

350: Width (mm)