




Product Information

MAXSTAR POWER EP-X is developed to reduce downtime of retensioning by tension stability improvement, and demonstrates its capability when used under high loads such as HVAC, compressor, construction equipment, and industrial pump.

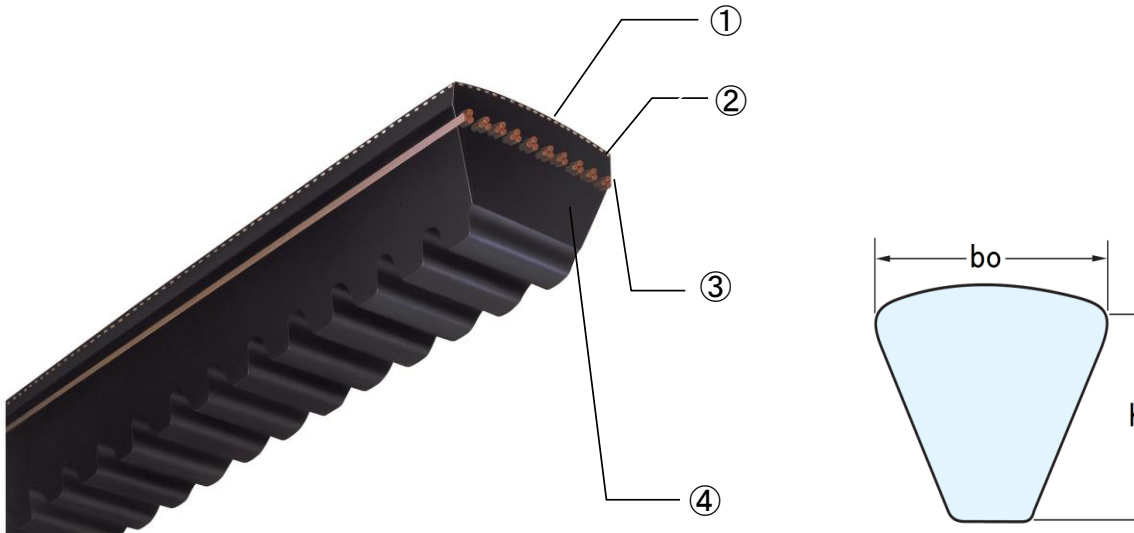

Cross Section	SPZX	SPAX	SPBX	SPCX
Belt type	Raw Edge Cogged			
Top width bo [mm]	9,7	12,7	16,3	22,0
Thickness h [mm]	8,0	10,0	13,0	18,0
① Cover fabric	Cotton			
② Adhesion rubber	EPDM			
③ Cord	Polyester			
④ Compression rubber	EPDM			
Heat resistance temperature [°C]	+130			
Cold resistance temperature [°C]	-40			
Max. belt speed [m/s]	40			
Electric conductivity	Yes			

Product Code

SPBX3550

SPB: Cross Section

BX: Cogged Type

3550: Belt Code (mm)